









ECO Slide rail EF

Product information

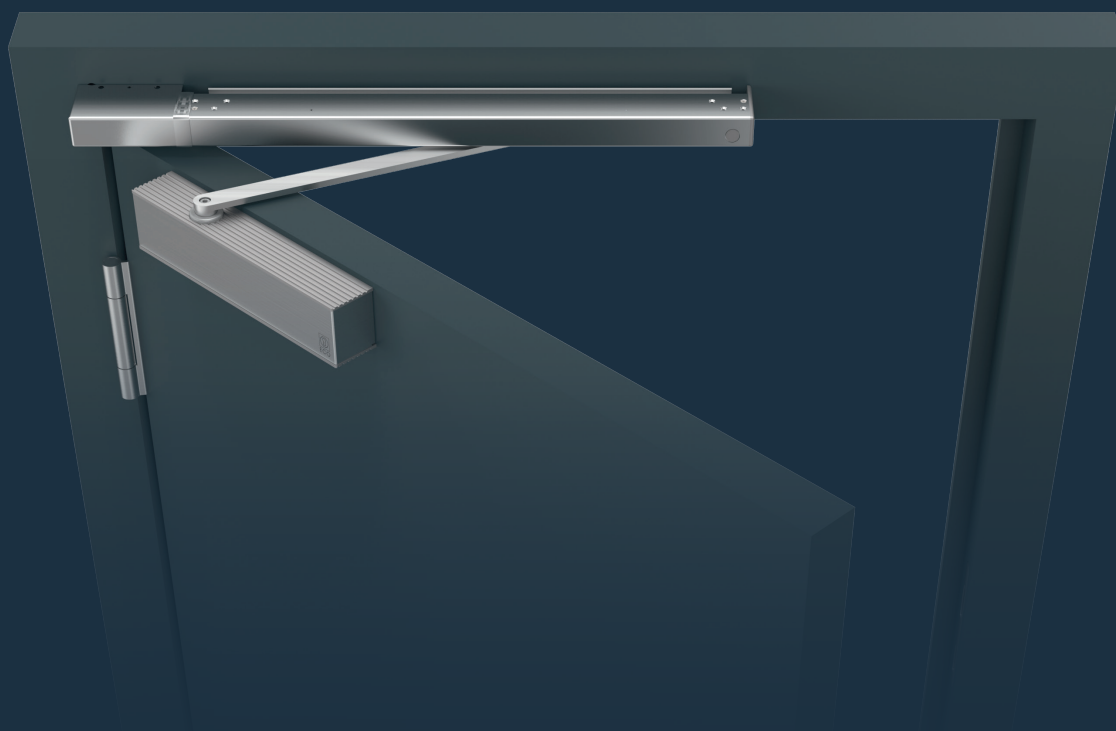

■ SYSTEM TECHNOLOGY FOR THE DOOR



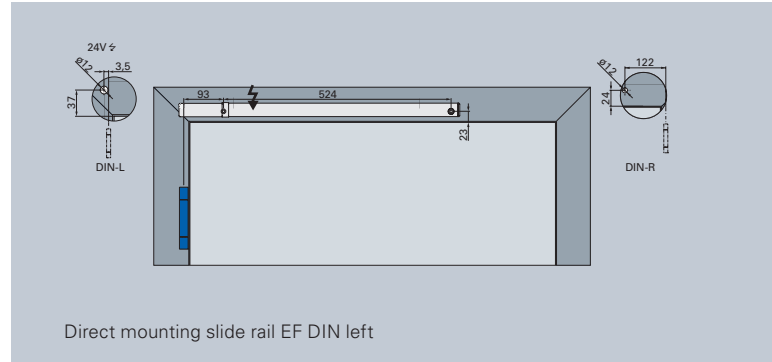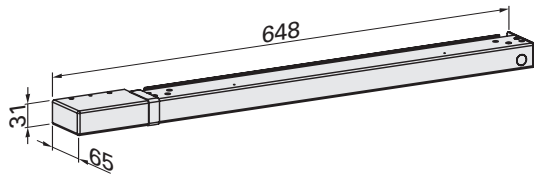

EF

Slide rail with electromagnetic hold-open, hinge side for all ECO Newton door closers

- **Controlled by:** External fire alarm system.
- **Hold open angle:** Approx. 70° to 145°
- **Power supply:** 24 V DC
- **Scope of Delivery:** Without arm, which is part of the door closer
- **Mounting:** Only hinge side
- **Slide rail:** Tested acc. to EN 1155


Slide rail EF

DIN left	Colour	Article number	DIN right	Colour	Article number
GS-EF (Si)	Silver RAL 9006	350220000A03501	GS-EF (Si)	Silver RAL 9006	350220000A03502
GS-EF (W)	White RAL 9016	350220000E03501	GS-EF (W)	White RAL 9016	350220000E03502
GS-EF (Br)	Brown RAL 8014	350220000D03501	GS-EF (Br)	Brown RAL 8014	350220000D03502
GS-EF (S)	Black RAL 9005	350220000G03501	GS-EF (S)	Black RAL 9005	350220000G03502
GS-EF (ER M)	Stainless steel satin	350220000Q03501	GS-EF (ER M)	Stainless steel satin	350220000Q03502



ECO Mounting variants – hinge side


Direct mounting



Direct mounting is the standard mounting at ECO. Slide rail is mounted directly onto the door frame. The ECO mounting holes need to be prepared. The respective mounting holes are shown on the next pages.

A paper drilling template is included in each box. Additionally, a metal drilling template or respective mounting holes as PDF or DXF files are available.


Mounting with standard profile



The mounting with the standard profile (SP) is used when the door frame is already equipped with the mounting drill holes 120/428,5 mm - e.g. for steel door frames or when exchanging / retrofitting.

The standard profile is mounted directly to the door frame and adapts the ECO drill holes to the prepared drill holes. It can be ordered separately as accessory.

Mounting with adaptor profile (ADP 30)



The adaptor profile (ADP) is being used when a stable mounting of the slide rail is not possible due to constructions (e.g. steel frame doors with double rebated notches). The adaptor profile is mounted directly to the door frame. The slide rail can be mounted onto the ADP and will be stable. It can be ordered separately as accessory.

The drilling dimensions for the adaptor profiles are included on the attached paper drilling template. Additionally, a metal drilling template or respective PDF or DXF files containing the dimensions can be available (www.eco-schulte.de)

The drawings of the slides on the following pages show the direct assembly.

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D - 58706 Menden

Telefon: +49 2373/9276-0
Fax: +49 2373/9276-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change