









ECO Slide rail EF BG

Product information

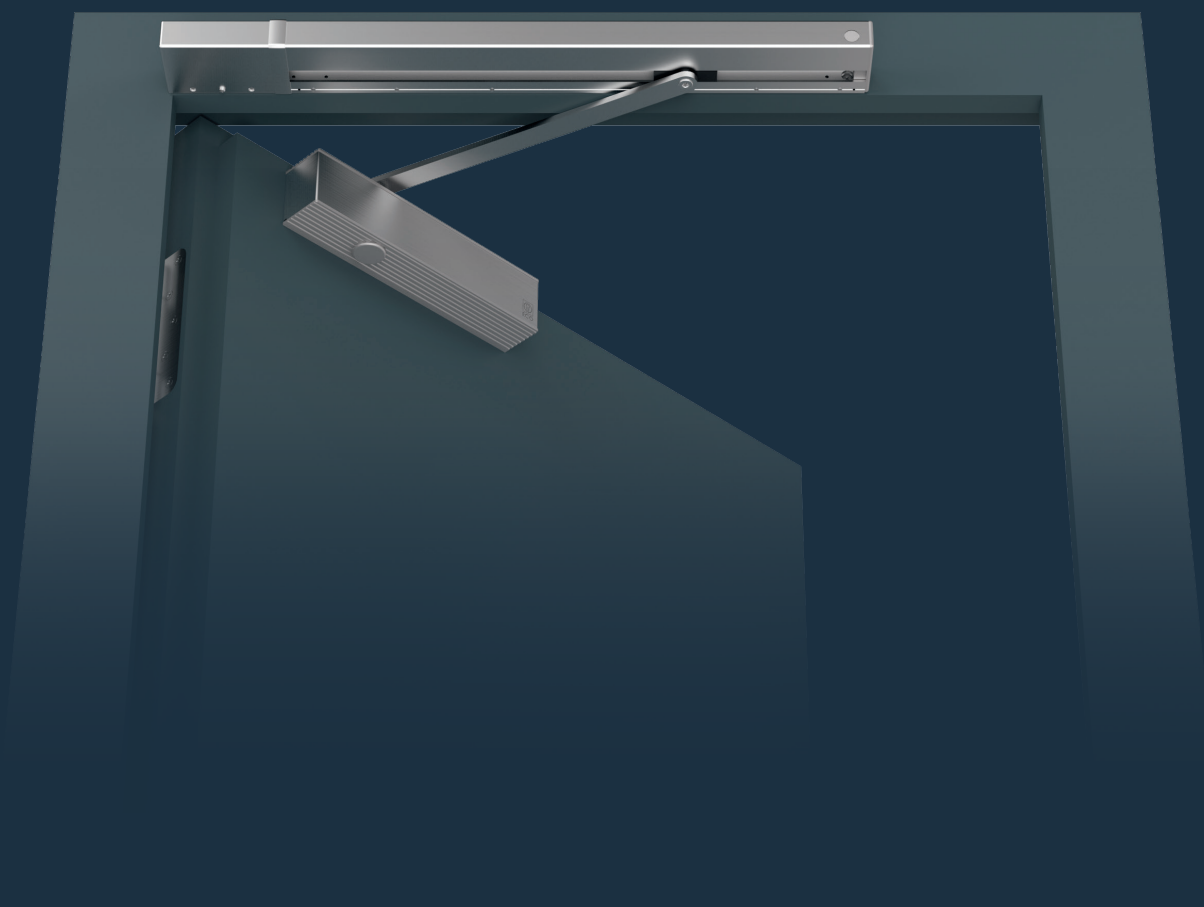

■ SYSTEM TECHNOLOGY FOR THE DOOR



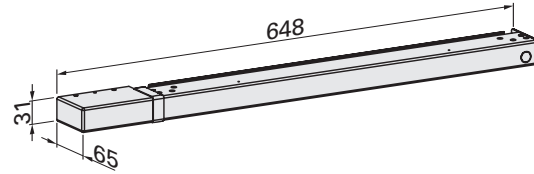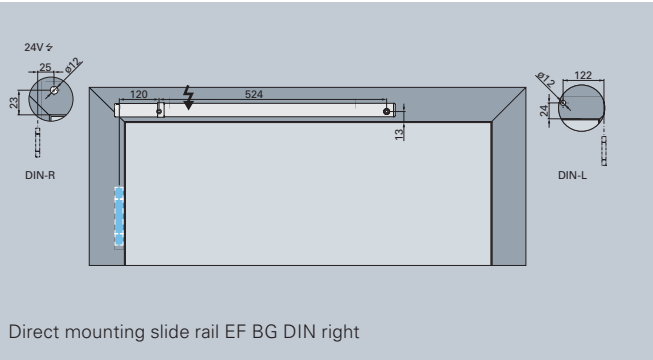

EF BG (Hinge-opposite side)

Slide rail with electromagnetic hold-open, hinge-opposite side
for all ECO Newton door closers

- **Controlled by:** External fire alarm system.
- **Hold open angle:** max. 110°
- **Power supply:** 24 V DC
- **Scope of Delivery:** Without arm, which is part of the door closer
- **Mounting:** Only hinge-opposite side.
- **Slide rail:** Tested acc. to **EN 1155**

Slide rail EF BG

DIN left	Colour	Article number	DIN right	Colour	Article number
GS-EF BG (Si)	Silver RAL 9006	35022BG00A03501	GS-EF BG (Si)	Silver RAL 9006	35022BG00A03502
GS-EF BG (W)	White RAL 9016	35022BG00E03501	GS-EF BG (W)	White RAL 9016	35022BG00E03502
GS-EF BG (Br)	Brwon RAL 8014	35022BG00D03501	GS-EF BG (Br)	Brwon RAL 8014	35022BG00D03502
GS-EF BG (S)	Black RAL 9005	35022BG00G03501	GS-EF BG (S)	Black RAL 9005	35022BG00G03502
GS-EF BG (ER M)	Stainless steel satin	35022BG00Q03501	GS-EF BG (ER M)	Stainles steel satin	35022BG00Q03502

Note!


The use of an interrupt button for releasing the closing sequence selector is urgently required. The maximum opening angle of the leaves has to be limited by a suitable ground stopper. When using in schools, caserns and stadiums as well as in areas with a high potential of vandalism, we recommend the use of eletromagnetic door retainers.

For special dimensions (door leaf thickness, notches) please contact our technical support.

Please also order the accessories for the dcifferent mounting versions.


The maximum opening or holdo-pen angle is 110°!

X = 60 - 92 mm



ECO Mounting variants – hinge-opposite side


Direct mounting



Direct mounting is the standard mounting at ECO. Slide rails is mounted directly onto the door frame. The ECO mounting holes need to be prepared. The respective mounting holes are shown on the next pages.

A paper drilling template is included in each box. Additionally, a metal drilling template or respective mounting holes as PDF or DXF files are available.


Mounting with adaptor profile (ADP 40)



The adaptor profile (ADP) is being used when a stable mounting of the slide rail is not possible due to constructions (e.g. steel frame doors with double rebated notches). The adaptor profile is mounted directly to the door frame. The slide rail can be mounted onto the ADP and will be stable. It can be ordered separately as accessory.

The drilling dimensions for the adaptor profiles are included on the attached paper drilling template. Additionally, a metal drilling template or respective PDF or DXF files containing the dimensions can be available (www.eco-schulte.de)

Mounting with under-lintel angle



The under-lintel angle (SFW) is being used for installation on the hinge-opposite side if the slide rail needs to be mounted under the door frame (for doors with deep door lintels).

The under-lintel angle is screwed bottom-up to the door frame and the slide rails is fixed to the under-lintel angle.

The drilling dimensions for the SFW are mentioned in the mounting instruction or can be available as PDF or DXF file (www.eco-schulte.de). The under-lintel angle can be ordered separately as accessory.

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D - 58706 Menden

Telefon: +49 2373/9276-0
Fax: +49 2373/9276-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change