





ECO D-120 Plate handle

Product information



■ SYSTEM TECHNOLOGY FOR THE DOOR




Product characteristics

Tested acc. to	EN 1906
With 9 mm spindle acc. to DIN 18273 fire protection tested	F
Lever form for escape doors and emergency exits	EN 179
Restoring spring	-
Fixable bearing	■
Steel base with positioning studs	■
Concealed through-screw technology	■
DIN left / right	■


Classification key EN 1906

4	7	-	B1	1	4	0	U
---	---	---	----	---	---	---	---

■ Yes - No □ Option

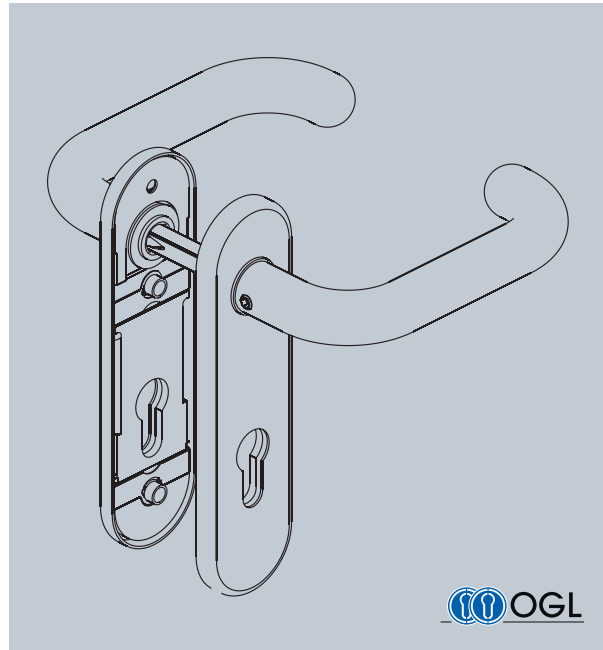

Material:




Bearing technology:




PRODUCT FAMILY D-100

Standard handle

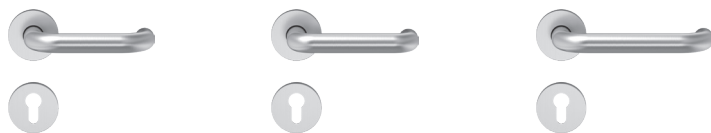

D-110 D-120 D-190

Long- / short plate handle

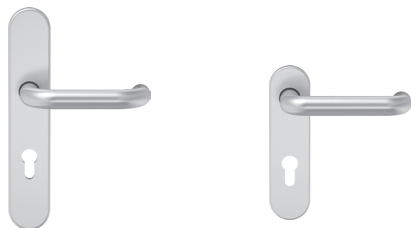

D-110 D-110

Oval rose handle



D-115 D-116

Security handle



D-110 D-111 D-116

Window handle



F-110


D-120 Short plate (K)



D-120 Short plate with OGL – friction bearing technology

Lever guidance consists of a closed, maintenance-free friction bearing with self-lubricating plastic. Fixable bearing. DIN left / DIN right useable. Steel base with positioning studs. Concealed, continuous screw connection.

Utilization category class 4. Positioning studs Ø 8 x 5 mm




DD-PZ
FS-DD




DD-BB



WC
AV




WSG K-130
FS-WSG



WSG K-165
FS-WSG

OGL – OGL – SHORT PLATE HANDLE (K)



= 4 7 - B1 1 4 0 U



	Ø	▧	Sets						Passive leaf sets	
	21 mm	8 mm		106a05.46	106a00.46	106a10.46	106a60.46	106a20.46		
	21 mm	9 mm	306a81.46	306a00.46		306a60.46	306a63.46		306a25.46	306a18.46 306a17.46
	21 mm	9 mm		306a50.46						

Finish: Stainless steel satin brushed. PVD and polished on request

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D - 58706 Menden

Telefon: +49 2373/9276-0
Fax: +49 2373/9276-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change