





# ECO D-410 Combined security handle

## Product information



### ■ SYSTEM TECHNOLOGY FOR THE DOOR





**Product characteristics**

Tested acc. to	<b>EN 1906</b>
With 9 mm spindle acc. to DIN 18273 fire protection tested	<b>F</b>
Lever form for escape doors and emergency exits	<b>EN 179</b>
Tested acc. to	<b>DIN 18 257</b>
Fixable bearing	■
Steel base in inner rose and outer plate	■
Concealed continuous screw connection	■
Inside with lever / OGL <b>Click</b>	■
DIN left / right	■
With or without return spring	A
Suitable for resistance class <b>RC 2</b>	■

Classification key EN 1906

4	7	-	B1/D1	1	4	2	A
---	---	---	-------	---	---	---	---

■ Yes – No □ Option

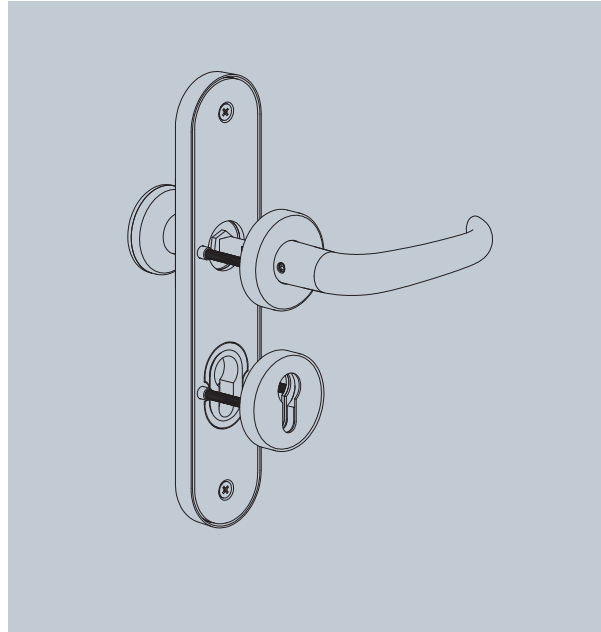

Material:




Bearing technology:




**PRODUCT FAMILY D-400**

**Standard handle      Oval rose handle      Window handle**

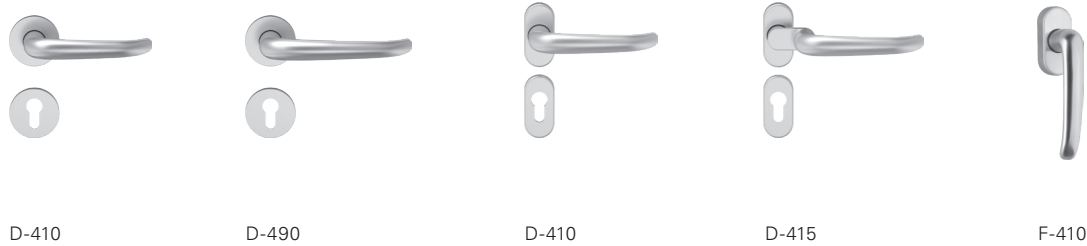

**Long- / short plate handle      Combined security handle**

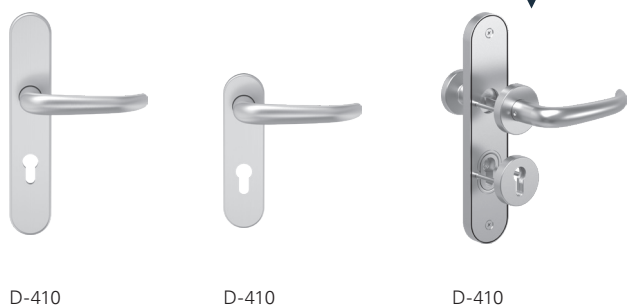

# D-410 Combined security handle ES 1



## D-410 Combined security handle ES 1 with OGL Click







- Fixable (through ECO OGL Click-System) in maintenance-free friction bearing
- Approved for fire protection
- Burglary resistance class ES 1
- Suitable for resistance class RC 2
- Available with knobs K-130, K-160, K-165 and grip plates G-150, G-160, G-180
- Spring system A and U (A = With spring support / U = Without spring support)
- High-strength pin connection (grooved spindle with stamping grub screw)
- Permanent function class 4

### OG L – COMBINED SECURITY HANDLE



F = 4 7 - B1 1 4 2 A









				Security handle ZA/Oval rose handle PZ					
				K-130/D-410	K-160/D-410	K-165/D-410	G-150/D-410	G-160/D-410	G-180/D-410
	∅	Distance	▧						
<b>S</b>	21 mm	72 mm	8 mm	5030048784	5030048785	5030048786	5030048787	5030048788	5030048789
<b>F</b>	21 mm	72 mm	9 mm	5030048793	5030048794	5030048795	5030048796	5030048797	5030048798

Finish: Stainless steel satin brushed, further colours on request



F = 4 7 - D1 1 4 2 A



				Security handle ZA/Oval rose handle PZ					
				K-130/D-410	K-160/D-410	K-165/D-410	G-150/D-410	G-160/D-410	G-180/D-410
	∅	Distance	▧						
<b>S</b>	22 mm	72 mm	8 mm	5030048841	5030048844	5030048846	5030048847	5030048848	5030048849
<b>F</b>	22 mm	72 mm	9 mm	5030048850	5030048851	5030048852	5030048853	5030048855	5030048856

Finish: Aluminium anodized F1, further colours and executions on request

The execution ZA is designed for cylinder projections of 10 – 15 mm.

**S** Standard handle for door thicknesses: 38 – 45 mm. **F** Fire protection doors for door thicknesses: 44 – 54 mm. Combined security handles for further door thicknesses on request.



ECO Schulte GmbH & Co. KG  
Iserlohner Landstraße 89  
D - 58706 Menden

Telefon: +49 2373/9276-0  
Fax: +49 2373/9276-40

[info@eco-schulte.de](mailto:info@eco-schulte.de)  
[www.eco-schulte.de](http://www.eco-schulte.de)

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten  
© ECO Schulte GmbH & Co. KG - Subject to change