





# ECO D-510 Plate handle

## Product information



### ■ SYSTEM TECHNOLOGY FOR THE DOOR




**Product characteristics**

Tested acc. to	EN 1906
With 9 mm spindle acc. to DIN 18273 fire protection tested	F
Lever form for escape doors and emergency exits	EN 179
Restoring spring	-
Fixable bearing	■
Steel base with positioning studs	■
Concealed through-screw technology	■
DIN left / right	■

Classification key EN 1906

4	7	-	B1	1	4	0	U
---	---	---	----	---	---	---	---

■ Yes - No □ Option

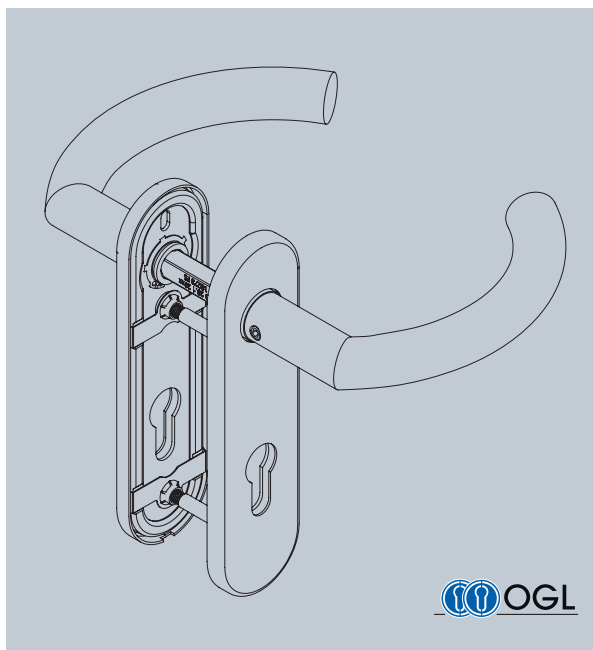

Material:



Bearing technology:



**PRODUCT FAMILY D-500**

**Standard handle**



D-510

**Short plate handle**



D-510

**Oval rose handle**



D-515


# D-510 Short plate (K)



## D-510 Short plate (K) with OGI – friction bearing technology

Lever guidance consists of a closed, maintenance-free friction bearing with self-lubricating plastic. Fixable bearing. DIN left / DIN right useable. Steel base with positioning studs. Concealed, continuous screw connection.

Utilization category class 4. Positioning studs Ø 8 x 5 mm



DD-PZ  
FS-DD




DD-BB



WC  
AV




WSG K-130  
FS-WSG



WSG K-165  
FS-WSG

### OGI – SHORT PLATE HANDLE (K)




= 4 7 - B1 1 4 0 A/U



			Sets						Passive leaf sets	
	Ø	▧								
	21 mm	8 mm		106905.46	106900.46	106910.46	106960.46	106920.46		
	21 mm	9 mm	306981.46	306900.46		306960.46	306963.46		306925.46	306918.46 306917.46

Finish: Stainless steel satin brushed. PVD and polished on request



= 4 7 - D1 1 4 0 U



			Sets						Passive leaf sets	
	Ø	▧								
	22 mm	8 mm			107905.30	107900.30	107910.30	107920.30		
	22 mm	9 mm	307981.30	307983.30		307900.30	307960.30		307925.30	307918.30 307917.30

Finish: Aluminium anodized F1, further colours on request

ECO Schulte GmbH & Co. KG  
Iserlohner Landstraße 89  
D - 58706 Menden

Telefon: +49 2373/9276-0  
Fax: +49 2373/9276-40

[info@eco-schulte.de](mailto:info@eco-schulte.de)  
[www.eco-schulte.de](http://www.eco-schulte.de)

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten  
© ECO Schulte GmbH & Co. KG - Subject to change