



ECO G-170 bullet resistant security handle ES 3




Product information



■ SYSTEM TECHNOLOGY FOR THE DOOR



G-170 bullet resistant security handle ES 3

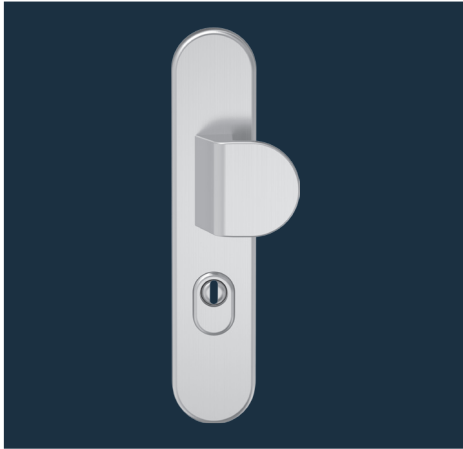


G-170 Bullet resistant security handle ES 3 mit OGL – friction bearing technology

Burglary protection class ES 3 acc. to DIN 18257 and EN 1906 class 4. Available with lever D-110.


Maintenance-free friction bearing. DIN left / right usable. Utilization category class 4.

Outside: Mounting height 15 mm
Short fixation bolts on request.

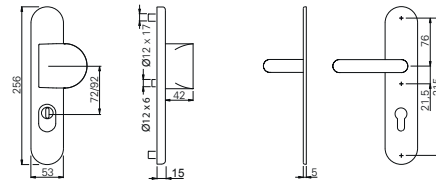

WSG G-170
FS-WSG ZA

OGL – BULLET RESISTANT SECURITY HANDLE




EN 1906 EN 179 F

F = 4 7 - B1 1 3 4 U



				Sets ZA
	Ø	Distance	∇	
F	21 mm	72 mm	9 mm	5030037868
F	21 mm	92 mm	9 mm	5030037870

Finish: Stainless steel satin brushed, further colours on request



EN 1906 EN 179 F

F = 4 7 - D1 1 3 4 U

				Sets ZA
	Ø	Distance	∇	
F	22 mm	72 mm	9 mm	5030037871
F	22 mm	92 mm	9 mm	5030037872

Finish: Aluminium anodized F1, further colours on request



Targeted safety tested in extreme situations

Bullet resistant security handles from ECO Schulte serve the personal protection and the object security. Depending on the resistance class, our handles are able to stop projectiles. According to EN 1522, ECO handles can be planned as part of a safety concept. They are always available as security handles.

Possible areas of application:

Police stations, ministries and authorities, embassies, banks and airports.



ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D - 58706 Menden

Telefon: +49 2373/9276-0
Fax: +49 2373/9276-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change