






ECO GBS 81



Product information




■ SYSTEM TECHNOLOGY FOR THE DOOR





Product characteristics		
Lock type	PZ-72 (handle / knob execution)	■
	RZ-74 (handle / knob execution)	□
Backset	55	□
	65	■
	80	■
	100	■
Face plate	Stainless steel	■
	Steel zinc-plated	▣
Face plate width	20 round (rebate)	■
	24 round (flush)	■
Hub	9 mm	■
Suitable for the use on fire- and smoke control doors	F	■
Tested and approved acc. to DIN / EN	DIN 18 250 EN 12 209	
■ Yes - No □ On request ▣ See execution		
 Wooden door  Steel door		

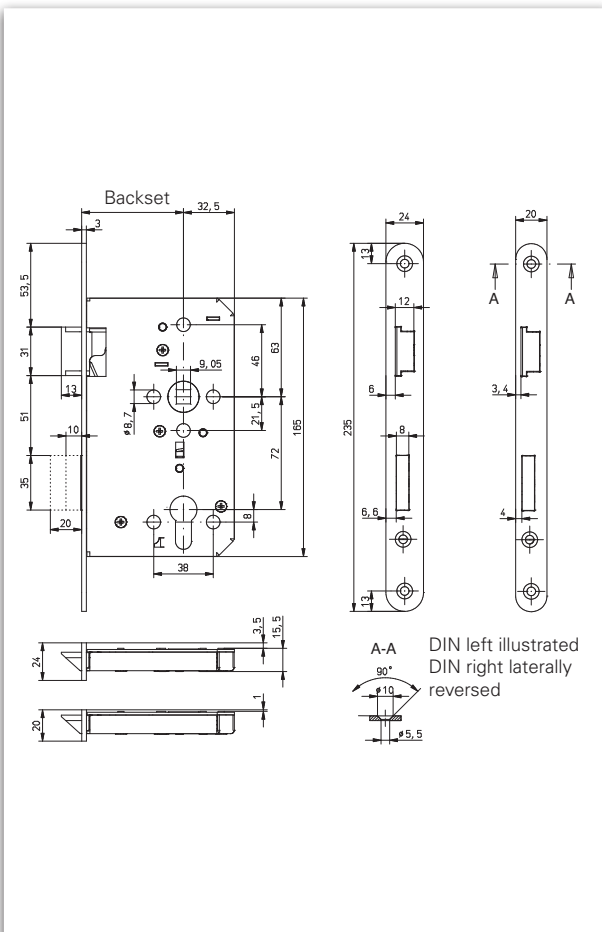

Description

- Mortise lock for fire- and smoke control doors
- Tested and approved acc. to **DIN 18 250, EN 12 209**
- Face plate square on request

Individual stamping possible on request and at an extra charge.



ECO

GBS 81 ■ Mortise lock for fire- and smoke control doors

DIN 18 250

EN 12 209

F

Face plate finish	Backset in mm	Face plate form	Face plate 20 x 235 mm / PZ-72 (handle / knob execution)		Face plate 24 x 235 mm / PZ-72 (handle / knob execution)	
			DIN left	DIN right	DIN left	DIN right
Stainless steel	65	round	2081_2AN40BK013	2081_2AN40BK014	2081_2AN40aK013	2081_2AN40aK014
	80	round	2081_2AR40BK013	2081_2AR40BK014	2081_2AR40aK013	2081_2AR40aK014
	100	round	2081_2AV40BK013	2081_2AV40BK014	2081_2AV40aK013	2081_2AV40aK014
Steel zinc-plated	65	round round	-	-	2081_2AN40aJ013	2081_2AN40aJ014

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D - 58706 Menden

Telefon: +49 2373/9276-0
Fax: +49 2373/9276-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change