





# ECO GBS 96 AVP

## Product information





### ■ SYSTEM TECHNOLOGY FOR THE DOOR



**GBS 96 AVP**

**Product characteristics**

Lock type	PZ-92	■
	RZ-94	□
Backset	30, 35, 40, 45	■
		□
Panic function	B	■
	E	■
	B- inwards	□
Face plate	Stainless steel	■
Face plate width	24	■
	22	□
Face plate length	24 x 6 U / 22 x 6 U	□
	245	■
	270	■
Hub	9 mm	■
Suitable for the use on fire- and smoke control doors	<b>F</b>	■
Tested and approved acc. to DIN / EN	EN 179  EN 1125 	
	EN 12 209	


■ Yes - No □ On request



Wooden door



Profile frame door

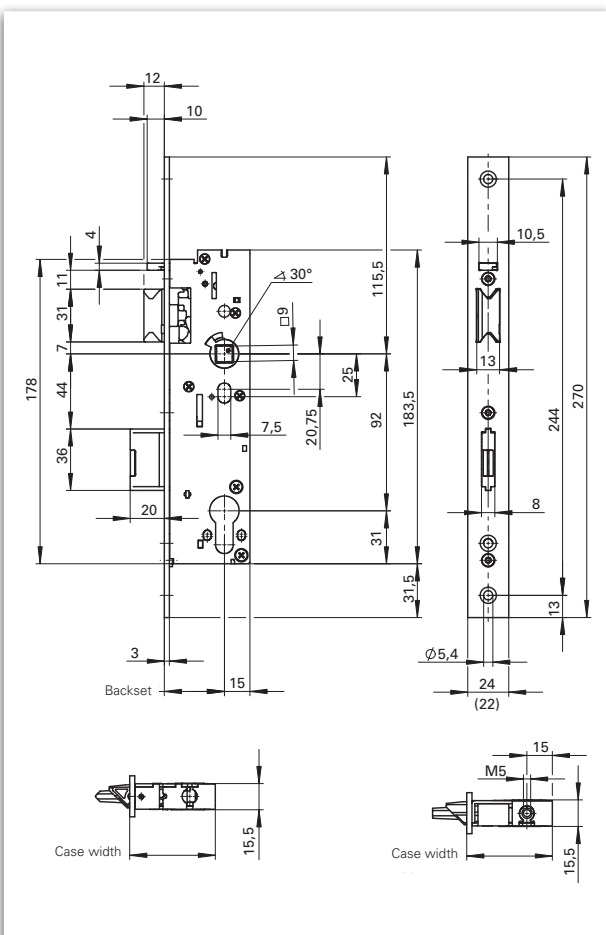

Dimensioning: GBS 96 AVP

**Description**

- Panic mortise lock
- Related lock for passive leaf GBS 98
- Suitable for fire- and smoke control doors
- Tested and approved acc. to **EN 179, EN 1125** and **EN 12 209**
- Dead bolt exclusion: 20 mm- single turn
- Panic function E: DIN left / DIN right usable
- As option: prepared for top-locking
- Necessary accessories for top-locking: Locking rod above and snap lock
- Latch and dead bolt protruding 3 mm or 5 mm on request
- Dead bolt- or Hub monitoring on request

Individual stamping possible on request and at an extra charge.

**GBS 96 AVP ■ Automatic self-engaging panic mortise lock for fire- and smoke control doors****Panic function E**

Face plate finish	Backset in mm	Face plate form	Face plate 24 x 245 mm (handle / knob execution)	Face plate 24 x 270 mm (handle / knob execution)
			DIN left / DIN right	DIN left / DIN right
Stainless steel	30	square	2096acbS2o34030	2096acbS2q34030
	35	square	2096adbS2o34030	2096adbS2q34030
	40	square	2096aebS2o34030	2096aebS2q34030
	45	square	2096afbS2o34030	2096afbS2q34030

**Panic function B**

Face plate finish	Backset in mm	Face plate form	Face plate 24 x 245 mm		Face plate 24 x 270 mm	
			DIN left	DIN right	DIN left	DIN right
Stainless steel	30	square	2096acbS2o33130	2096acbS2o33230	2096acbS2q33130	2096acbS2q33230
	35	square	2096adbS2o33130	2096adbS2o33230	2096adbS2q33130	2096adbS2q33230
	40	square	2096aebS2o33130	2096aebS2o33230	2096aebS2q33130	2096aebS2q33230
	45	square	2096afbS2o33130	2096afbS2o33230	2096afbS2q33130	2096afbS2q33230

**Prepared for top-locking****Panic function E**

Face plate finish	Backset in mm	Face plate form	Face plate 24 x 245 mm (handle / knob execution)	Face plate 24 x 270 mm (handle / knob execution)
			DIN left / DIN right	DIN left / DIN right
Stainless steel	30	square	2096zcbS2o34030	2096zcbS2q34030
	35	square	2096zdbS2o34030	2096zdbS2q34030
	40	square	2096zebS2o34030	2096zebS2q34030
	45	square	2096zfbS2o34030	2096zfbS2q34030

**Panic function B**

Face plate finish	Backset in mm	Face plate form	Face plate 24 x 245 mm		Face plate 24 x 270 mm	
			DIN left	DIN right	DIN left	DIN right
Stainless steel	30	square	2096zcbS2o33130	2096zcbS2o33230	2096zcbS2q33130	2096zcbS2q33230
	35	square	2096zdbS2o33130	2096zdbS2o33230	2096zdbS2q33130	2096zdbS2q33230
	40	square	2096zebS2o33130	2096zebS2o33230	2096zebS2q33130	2096zebS2q33230
	45	square	2096zfbS2o33130	2096zfbS2o33230	2096zfbS2q33130	2096zfbS2q33230

ECO Schulte GmbH & Co. KG  
Iserlohner Landstraße 89  
D - 58706 Menden

Telefon: +49 2373/9276-0  
Fax: +49 2373/9276-40

[info@eco-schulte.de](mailto:info@eco-schulte.de)  
[www.eco-schulte.de](http://www.eco-schulte.de)

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten  
© ECO Schulte GmbH & Co. KG - Subject to change